



STANDARD MOTOR MOUNTING POSITION

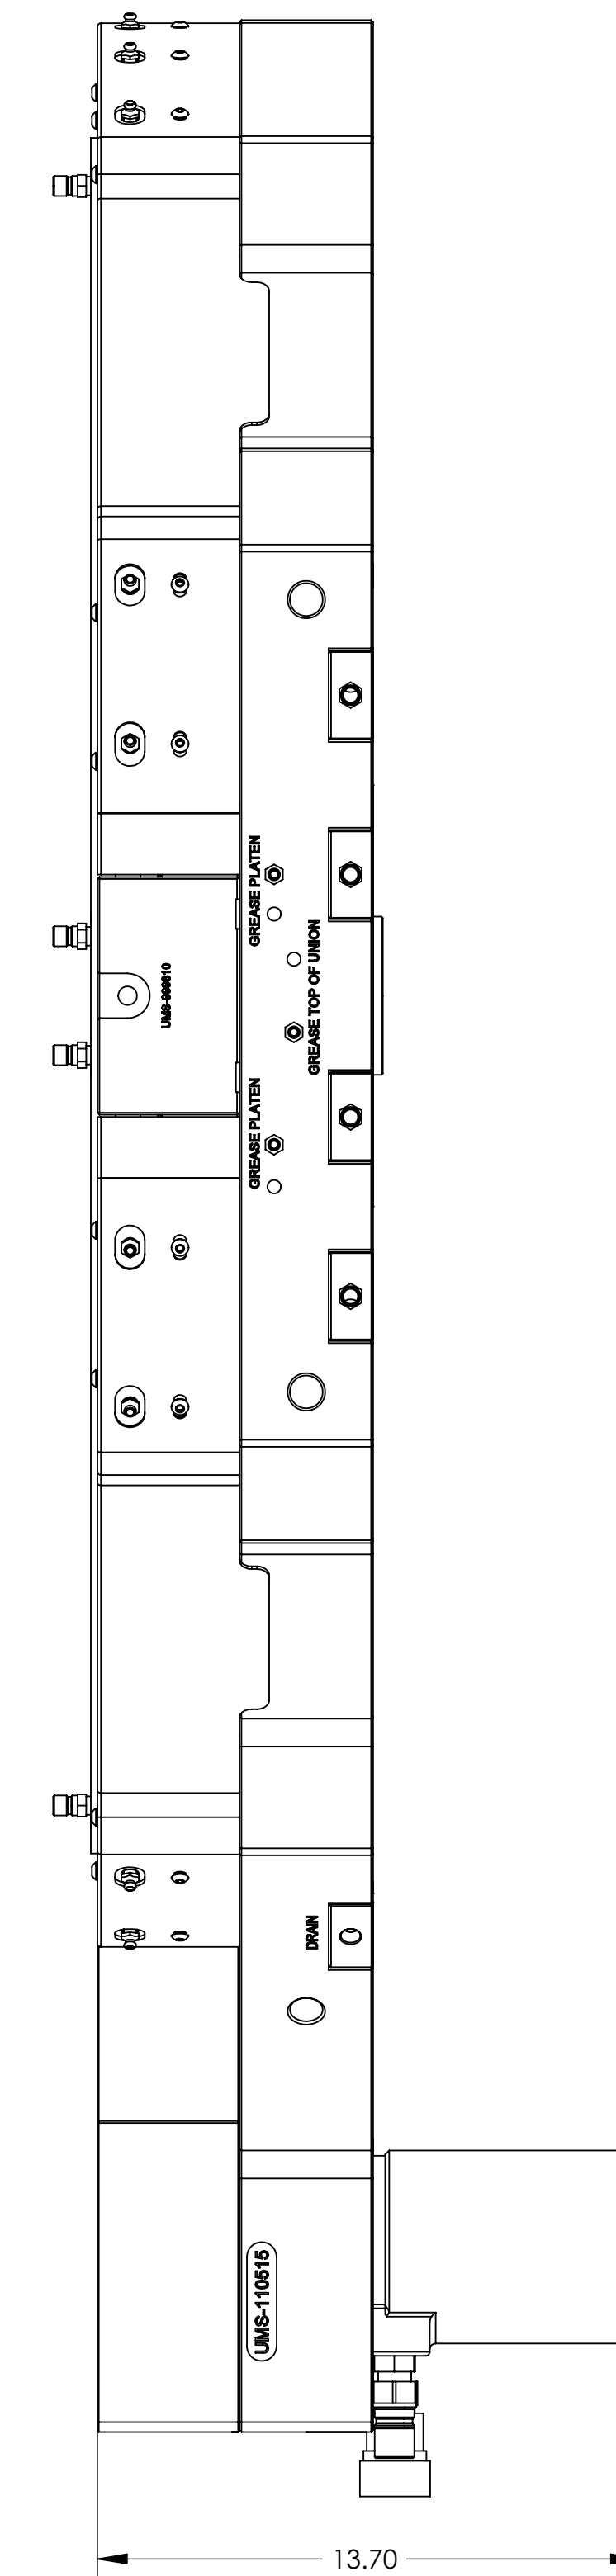

REAR MOUNTED MOTOR POSITION

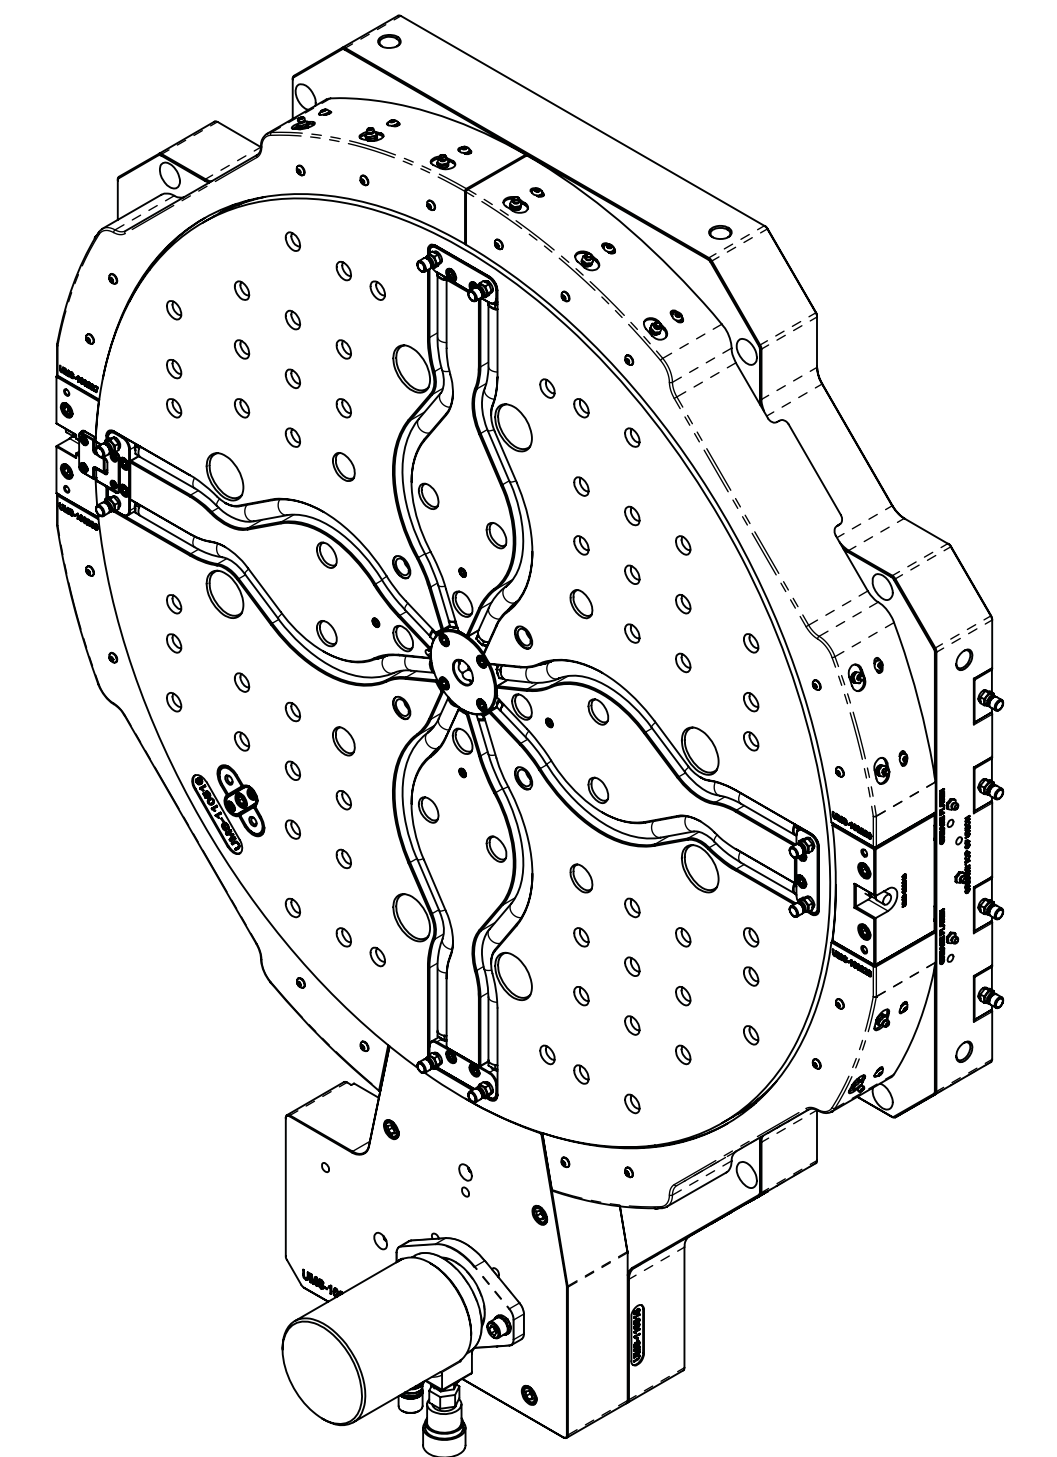

NOTE:
STANDARD MOUNTING POSITION FOR ALL UMS TURNABLE MODELS IS WITH HYDRAULIC DRIVE LOCATED IN THE 6:00'CLOCK POSITION. HYDRAULIC MOTOR CAN BE MOUNTED ON EITHER FRONT OR BACK OF TURNABLE AND IS EASILY CHANGED.

OPTIONAL TURNABLE MOUNTING POSITIONS ARE POSSIBLE BUT MAY REQUIRE LONGER HYDRAULIC HOSES AND SENSOR CONNECTIONS AND MAY ALSO REQUIRE MODIFICATION OF EXISTING MACHINE GUARDS, COVERS AND SAFETY INTERLOCK SYSTEMS.

APPROVAL PRINT REFERENCES ARE TO 1100MM HYDRO MODEL

SERIAL # _____

PLEASE CHECK PRINT DIMENSIONS CAREFULLY. NOTE AND INITIAL ANY CHANGES OR CORRECTIONS PROMPT RETURN EXPEDITES DELIVERY OF YOUR ORDER.

APPD. BY _____ DATE _____

<small>PROPRIETARY AND CONFIDENTIAL</small> <small>This is proprietary and confidential material which is the sole property of MGS, MFG. CO. W188 N11701 Maple Road, Germantown, WI 53022 and may only be used in accordance with the reproduced or converted for any other use without the express written approval of MGS, MFG. CO.</small>		<small>W188 N11701 Maple Rd. Germantown, WI 53022 Phone: (262) 555-5795</small> 1100MM HYDRO THIN Customer Approval Drawing	
<small>TOLERANCES AND DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN ACCORDANCE WITH ASME Y14.5M-1995 (FUNDAMENTAL DIMENSIONS ARE IN INCHES)</small>		<small>DESCRIPTION</small> SEE INDIVIDUAL PART PRINTS	<small>UNIVERSAL</small> <small>UNIVERSAL</small>
<small>±.005</small> <small>±.01</small> <small>±.005</small> <small>±.005</small> <small>±.005</small>	<small>TURD</small> <small>ANGLE</small>	<small>DRAWN DATE:</small> 2/25/2008	<small>USED ON:</small> 1100MM THIN STD SPI
<small>Scale: 1:4</small>		<small>Rev:</small>	<small>Last saved by: gibbonsg</small> <small>Last saved on: Wednesday, June 25, 2008 9:52:35 AM</small>
		<small>Sheet 1 of 1</small>	